






BSS SOLENOID OPERATED SHUT-OFF VALVE


2W/2P high capacity fast acting shut-off valve in any hydraulic system.


Model	Port	Rated Pressure		Rated Flow		Solenoid
		bar	psi	lpm	gpm	Soleriold
BSS20B-24VDC-NO	SAE ORB -20	350	5,000	380	98	24V DC - Normally Open
BSS20B-24VDC-NC	SAE ORB -20	350	5,000	380	98	24V DC - Normally Closed




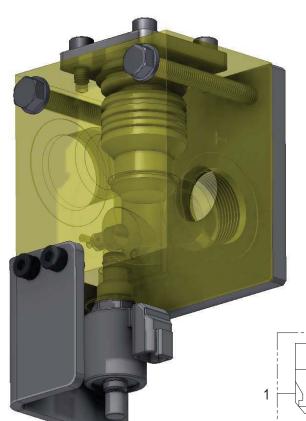


















[Hydraulic Schematic : NC]

[Simplified: NC]

[Hydraulic Schematic : NO]


[Simplified : NO]






TYPICAL APPLICATION

[SHUT-OFF VALVE : CRUSHER/ GRAPPLE]

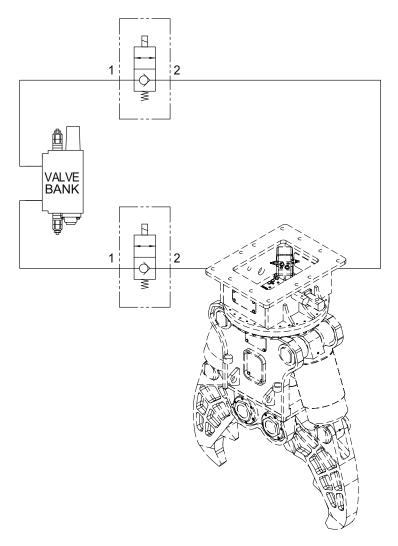


[SHUT-OFF VALVE : THUMB/ CRUSHER COMBO]

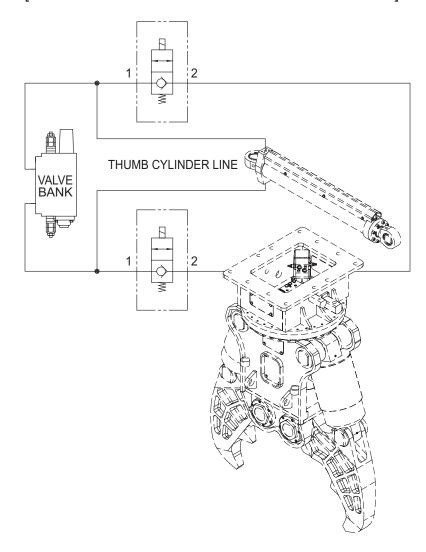



TYPICAL APPLICATION

[SHUT-OFF VALVE : CRUSHER/ COMPACTOR COMBO]

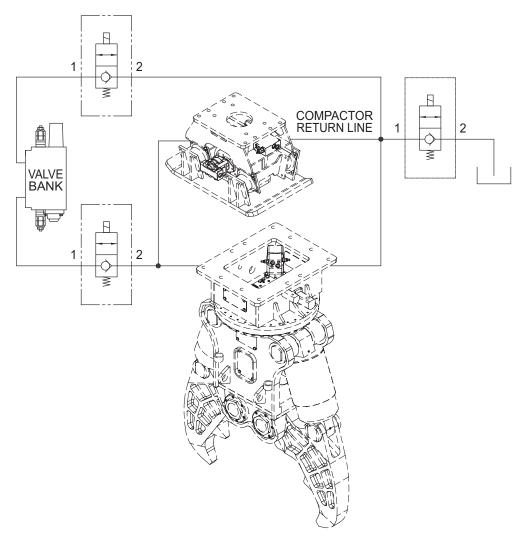

[DUMP VALVE : CRUSHER JAW OPEN CYCLE]

